

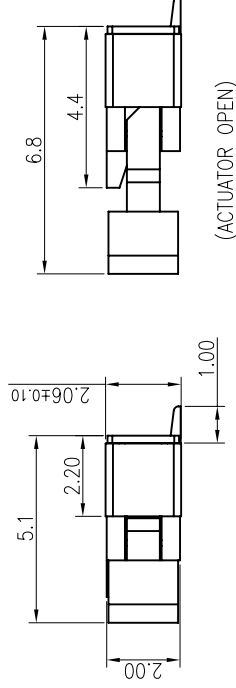
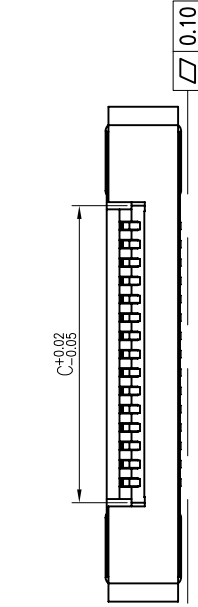


5. CODING INFORMATION: **EW527**-Xxx-00x

- PACKING: E: TUBE
R: CARRIER REEL
- STANDARD TYPE
- PIN
- PLATING: G: GOLD FLASH
L: TIN (LEAD FREE)
M: MATTE-TIN (LEAD FREE)
- 0.5 ZIF FPC SMT TOP CONTACT
- FPC CONNECTOR SERIES

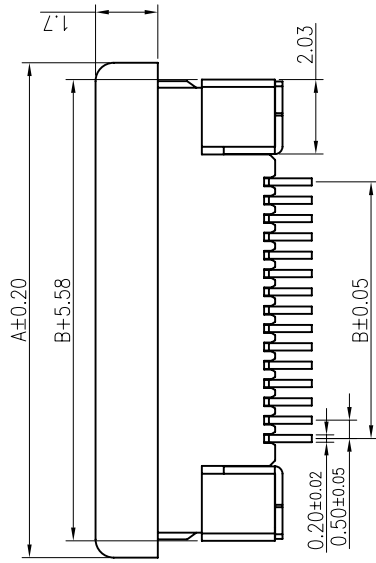

Technical drawing of a cross-section of a concrete slab with a hatched reinforcement layer. The drawing shows a total width of $(B+1)\pm 0.07$. The hatched layer has a thickness of 0.50 ± 0.08 . The concrete slab has a thickness of 0.30 ± 0.05 . The total height of the slab is $B\pm 0.05$. The hatched layer is positioned $3.00(\text{MIN})$ from the bottom edge.

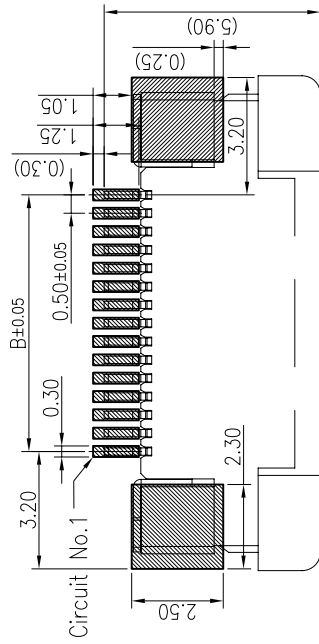

No. of contacts	Dimensions			No. of contacts	Dimensions		
	A	B	C		A	B	C
4	8.0	1.50	2.60	33	22.50	16.50	17.10
5	8.50	2.00	3.10	34	22.50	16.50	17.60
6	9.00	2.50	3.60	35	23.00	17.00	18.10
7	9.50	3.00	4.10	36	23.50	17.50	18.60
8	10.00	3.50	4.60	37	24.50	18.00	19.10
9	10.50	4.00	5.10	38	25.00	18.50	19.60
10	11.00	4.50	5.60	39	25.50	19.00	20.10
11	11.50	5.00	6.10	40	26.00	19.50	20.60
12	12.00	5.50	6.60	41	26.50	20.00	21.10
13	12.50	6.00	7.10	42	27.00	20.50	21.60
14	13.00	6.50	7.60	43	27.50	21.00	22.10
15	13.50	7.00	8.10	44	28.00	21.50	22.60
16	14.00	7.50	8.60	45	28.50	22.00	23.10
17	14.50	8.00	9.10	46	29.00	22.50	23.60
18	15.00	8.50	9.60	47	29.50	23.00	24.10
19	15.50	9.00	10.10	48	30.00	23.50	24.60
20	16.00	9.50	10.60	49	30.50	24.00	25.10
21	16.50	10.00	11.10	50	31.00	24.50	25.60
22	17.00	10.50	11.60	51	31.50	25.00	26.10
23	17.50	11.00	12.10	52	32.00	25.50	26.60
24	18.00	11.50	12.60	53	32.50	26.00	27.10
25	18.50	12.00	13.10	54	33.00	26.50	27.60
26	19.00	12.50	13.60	55	33.50	27.00	28.10
27	19.50	13.00	14.10	56	34.00	27.50	28.60
28	20.00	13.50	14.60	57	34.50	28.00	29.10
29	20.50	14.00	15.10	58	35.00	28.50	29.60
30	21.00	14.50	15.60	59	35.50	29.00	30.10
31	21.50	15.00	16.10	60	36.00	29.50	30.60
32	22.00	15.50	16.60	61	36.50	30.00	31.10

THICKNESS 0.30 ± 0.03

<i>CUSTOMER</i>	EWCONNECTOR E-World Electronic Ind
-----------------	--

RECOMMENDED PCB PATTERN DIM.

TOLERANCE : ± 0.05

EWCONNECTOR
TEL: +86-755-33514075
FAX: +86-755-22142154
<http://www.ewconn.com>

[illegible]